

# CLM-2 CAMERA LIGHT MODULE

## CAMERA LIGHT MODULE

The Jacques CLM-2 Camera Light Module is a standalone module that features a standard 12 v lamp and a cavity for a 3rd party CCTV camera. The module can be used standalone to provide additional lighting for the use of a CCTV camera or in conjunction with a Jacques Slave Intercom (Series VSL-x4x).

The CLM-2 module consists of a rugged 2mm Stainless Steel front panel, with two large holes for the lamp and a camera\*. The 12 watt dichroic lamp is mounted on brackets behind a protective polycarbonate sheet cover for protection. The Camera Light Module and Jacques Slave Intercom Station can be mounted inside a Jacques BOL-1 bollard enclosure if required.

\*NOTE: CCTV camera not supplied.



## INSTALLATION OPTIONS

Ideal installation of a complete visual calling station includes all of the following:

- Jacques CLM-2 Camera Light Module
- Jacques VSL-x4x Slave Intercom Module
- Jacques BOL-1 Bollard

## APPLICATIONS

Locations for the CLM-2 module, mounted inside the BOL-1 Bollard include:

- Entrances and exits of carparks
- Entrances and exits of buildings
- Entrances and exits of secured areas, such as correctional centres and police stations
- Loading docks
- Storage warehouses


## COMPLETE VISUAL CALLING STATION

Shown here is a complete Jacques visual calling station.

The frame is a Jacques BOL-1 Bollard.

Installed into the Bollard are a Jacques VSL-x4x Slave Intercom (with call button) and a Jacques CLM-2 Camera Light Module.

- 1 - CLM-2 Camera Light Module
- 2 - VSL-x4x Slave Intercom
- 3 - BOL-1 Bollard

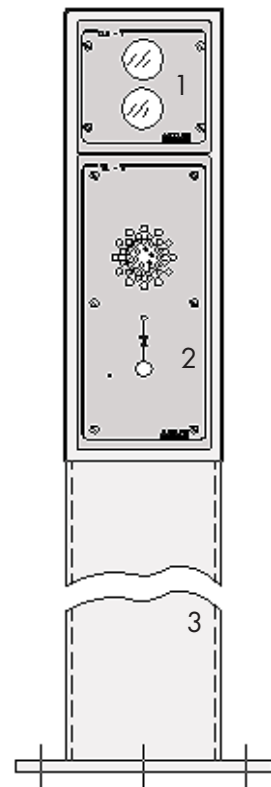

## ORDERING INFORMATION

Contact a Jacques Sales Representative:

Phone: +61 7 3844 1103 for your sales quote

Email: [sales@jacques.com.au](mailto:sales@jacques.com.au)

[www.jacques.com.au](http://www.jacques.com.au)


 **JACQUES**  
Future Proof Communications

CAMERA LIGHT MODULE

# CLM-2 CAMERA LIGHT MODULE

## DIMENSIONS

Front and side panel views.  
Mounting depth = 100 mm.  
(All dimensions in millimetres)

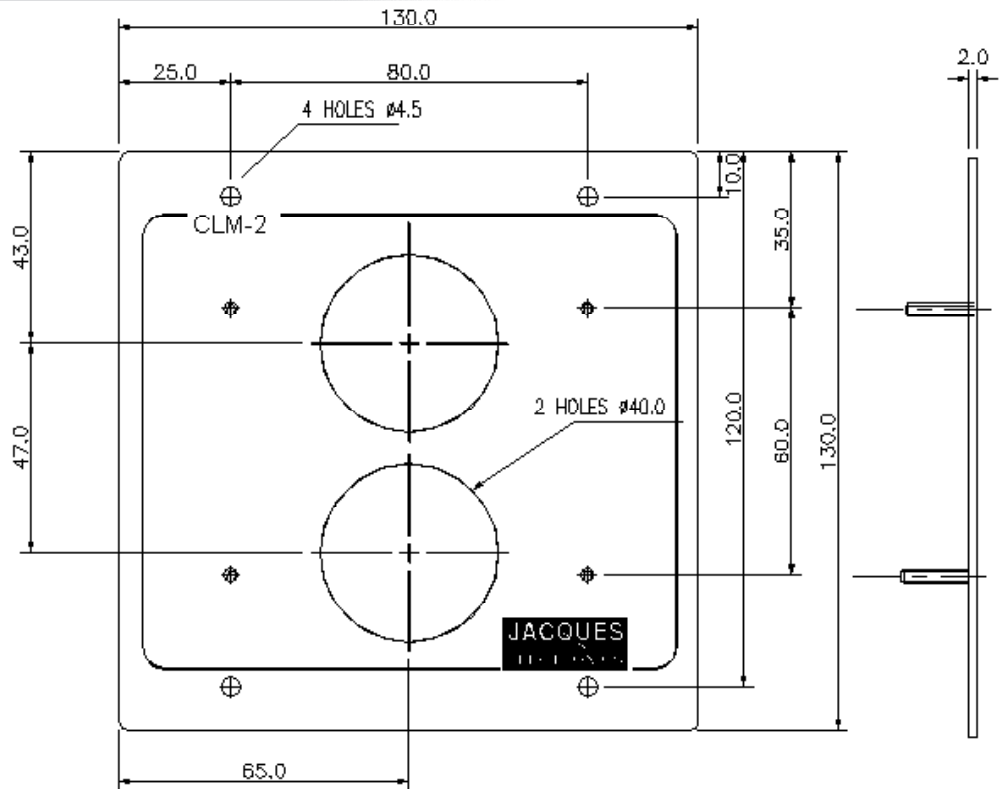

## SPECIFICATIONS

### Panel:

Dimensions

Width - 130mm, Height - 130mm, Mounting Depth - 100mm

Material finish

304 type stainless steel front panel 2mm thick with headings acid etched, completed with paint fill.

Mounting holes

4 x 4.5mm front panel mounting holes

Polycarbonate protection

A sheet of polycarbonate 95 mm x 95 mm x 5 mm thick, is located between the camera and lamp and the front panel holes. This ensures continuous protection to the camera and lamp against weather and vandalism.

### Lamp:

Operations

The Slave Intercom (located inside the Bollard under the CLM-2) has an internal relay that is used to automatically switch the lamp on and off. The lamp will automatically switch ON when CALL button is pressed at the Slave Intercom and automatically switches OFF when the call is disconnected from the Master.

Type

12 V d.c. 20 Watt Dichroic Lamp, 36°

Holder

2-pin BAB-type holder. Quick connect for easy replacement

### Part Number

50020

CLM-2

50176

BOL-1

## ORDERING INFORMATION

Contact a Jacques Sales Representative:

Phone: +61 7 3844 1103 for your sales quote

Email: [sales@jacques.com.au](mailto:sales@jacques.com.au)

[www.jacques.com.au](http://www.jacques.com.au)

 **JACQUES**  
Future Proof Communications