LIFT INTERCOM STATION

The Jacques Lift Intercom Station, LIS-3B1 is a module which facilitates the integration of a Jacques 650 series VoIP intercom station into an existing lift panel. Provision is made on the LIS-3B1 for the connection of a remote speaker, microphone, call buttons, LED indicators and relay outputs.

LIS-3B1 front

LIS-3B1 rear

FEATURES:

- Single pair communication between a lift car & the lift motor room – up to 2 km (used in conjunction with JCE-8B1)
- Speaker output for external 4 ohm, 2 W speaker
- Input for external electret microphone
- 4 configurable control or button inputs
- 2 LED drive outputs
- 2 configurable relay outputs
- Power input connector (24 V d.c. nominal)
- Front LED indicators for troubleshooting
- Flexible mounting options (shelf, wall, 19" rack card frame, DIN rail)

APPLICATIONS:

- Lifts

SPECIFICATIONS*:

LIS-3B1 - Extruded aluminium black anodised box

Dimensions:	(103 x 53 x 168) mm without terminating connectors
Weight:	0.50 kg
Power Source:	(12 - 32) V d.c. (24 V d.c. nominal)
Power Consumption:	12 W
Relay Contact Rating:	1 A, 30 V d.c.
Output Pwr (speaker):	2 W rms
Mic to VoIP Electrical Frequency Response (-3dB):	50 Hz - 7 kHz
Input Impedance:	Nom. 2 kΩ
Cabling:	Cat5, 5e, 6 UTP, 1 pair telephone cable
LED Drive Outputs:	2 x 33 mA current sourcing with dimming feature
Connectors:	3.81 mm spacing pluggable terminal blocks

*All specifications subject to change without notice

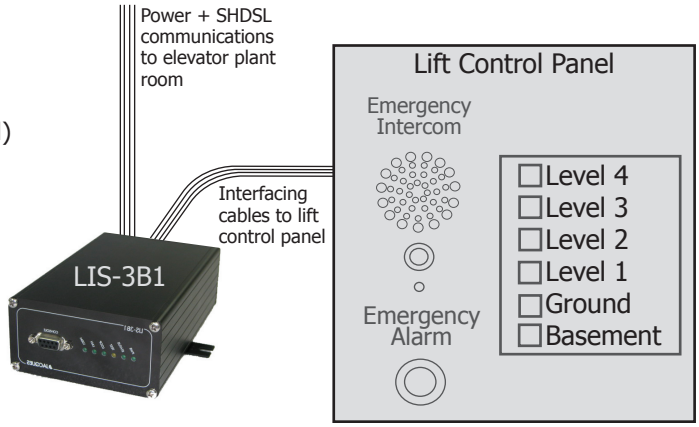

ORDERING INFORMATION

LIS-3B1 Order Number - 51173

Contact a Jacques Sales Representative:

Phone: +61 7 3844 1103 for your sales quote

Email: sales@jacques.com.au

Online: Coming soon, the Jacques Online Shop

www.jacques.com.au

JACQUES
Future Proof Communications

LIFT INTERCOM STATION